



TGU GmbH & Co. KG
Joseph-Monier Str. 2 48268
Greven


Tel.: 02575 - 955 87 0 Fax: HandelsregisterAmtsgericht
Steinfurt, HRB 31 56
02575 - 955 87 87 email: Gerichtsstand Steinfurt
info@tgu-greven.com Erfüllungsort Greven DE
125 543 036

Overview

PhormiTex Eclipse 1 + 98 - 400 cm

Product number: 19093400

Options

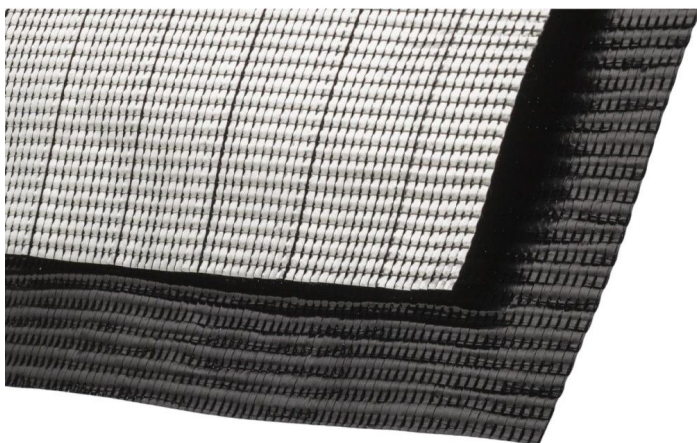

Width (cm):

325

400

430

480

530

Description

- **Application:** Blackout systems – suspended or laid
- **Material:** Two-layer woven banded fabric
- **Top Layer:** Aluminum-coated for sunlight reflection – reduces airspace heating
- **Inner Layer:** Black woven fabric for maximum blackout
- **Shading Rate:** Approx. 99.9%
- **Light Transmission:** Approx. 0.1%
- **Energy Savings:** Approx. 78%

Erstellt am 26.10.2025.

Dieses Dokument stellt kein Angebot da. Es gelten die aktuellen Preise im Online-Shop.

* Our offers are directed exclusively to companies. We do not conclude contracts with consumers. All prices excl. VAT plus shipping costs and possible delivery charges, if not stated otherwise.



TGU GmbH & Co. KG Tel.: 02575 - 955 87 0 Fax: HandelsregisterAmtsgericht
Joseph-Monier Str. 2 48268 02575 - 955 87 87 email: Steinfurt, HRB 31 56
Greven info@tgu-greven.com Gerichtsstand Steinfurt
Erfüllungsort Greven DE
125 543 036

- **UV Stability:** 600 kLy
- **Flame Retardant:** Certified to DIN 4102 B1
- **Width:** 400 cm
- **Weight:** 226 g/m² (±10%)
- **Features:**
 - Ideal for professional shading and blackout systems
 - Can be finished with curtain tapes

PhormiTex Eclipse 1 + 98 is a highly effective blackout screen designed for professional greenhouse installations. Its outer aluminum layer reflects sunlight, reducing excess heat buildup in the airspace above, while the inner black layer ensures complete darkness. With a shading level of 99.9% and energy savings of 78%, it is ideally suited for advanced climate control.

Note: Price refers to base fabric only. Additional charges may apply for fabrication (e.g. cutting, sewing).

Product information

Energy Saving:	78 %
Shading:	99,9 %
Direct Light transmission:	0,1 %
Flame retardant (DIN 4102 B1):	Yes
UV Stabilization:	600 kLy
Weight (+/- 10%):	226 g/m ²

Erstellt am 26.10.2025.

Dieses Dokument stellt kein Angebot da. Es gelten die aktuellen Preise im Online-Shop.

* Our offers are directed exclusively to companies. We do not conclude contracts with consumers. All prices excl. VAT plus shipping costs and possible delivery charges, if not stated otherwise.