

Overview

Cable pulley 100, double ball bearing for wires until 9 mm

Product number: 04200125-1

Options

PU (Pcs)



Description

Thanks to two ball bearings, the 100 mm pulley is guided particularly securely on the axle and has a high level of stability under shear loads.

The integrated spacers make it particularly easy to mount the pulley. No spacers or washers are needed.




- Impact resistant pulley
- Two ball bearings with integrated spacers
- Load capacity: up to 350 kg
- Made in Germany



TGU GmbH & Co. KG
Joseph-Monier-Str. 2
48268 Greven
Deutschland

Kontakt:
Telefon: +49 2575/95587-
15
Fax: +49 2575/95587-87
E-Mail: info@tgu-shop.com

Rechtliches:
Amtsgericht Ibbenbüren
USt-ID-Nr.:
DE 125543036

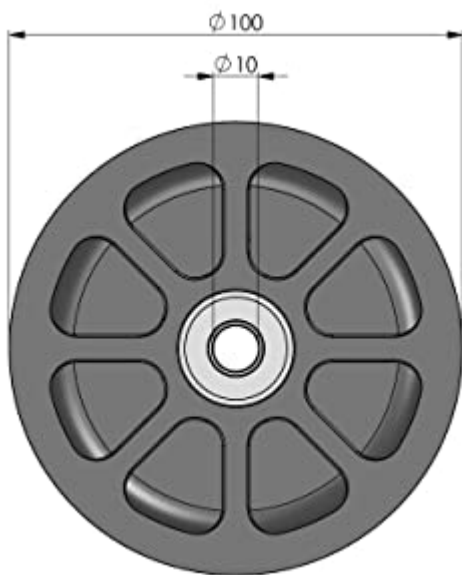

- Outer diameter: 100 mm
- compatible with 10 mm bolt



- Total width: 20 mm
- Rope diameter: up to $\phi 9$ mm

Erstellt am 20.04.2026.

Dieses Dokument stellt kein Angebot da. Es gelten die aktuellen Preise im Online-Shop.

All prices excl. VAT plus shipping costs and possible delivery charges, if not stated otherwise.