



TGU GmbH & Co. KG
Joseph-Monier-Str. 2
48268 Greven
Deutschland

Kontakt:
Telefon: +49 2575/95587-
15
Fax: +49 2575/95587-87
E-Mail: info@tgu-shop.com

Rechtliches:
Amtsgericht Ibbenbüren
USt-ID-Nr.:
DE 125543036

Overview


Cable pulley 90 with clamp 55.34

Product number: 04055034-1

Options

PU (Pcs)

1

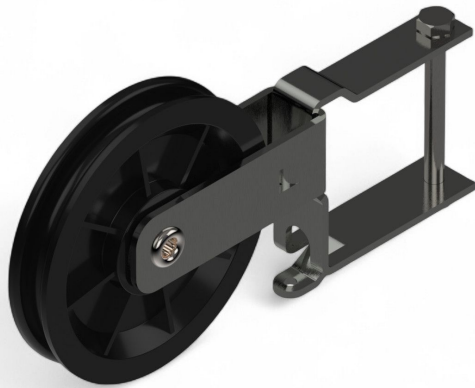

Erstellt am 26.07.2026.

Dieses Dokument stellt kein Angebot da. Es gelten die aktuellen Preise im Online-Shop.

All prices excl. VAT plus shipping costs and possible delivery charges, if not stated otherwise.



TGU GmbH & Co. KG
Joseph-Monier-Str. 2
48268 Greven
Deutschland

Kontakt:
Telefon: +49 2575/95587-
15
Fax: +49 2575/95587-87
E-Mail: info@tgu-shop.com

Rechtliches:
Amtsgericht Ibbenbüren
USt-ID-Nr.:
DE 125543036

Description

- **Application area:** Guiding and redirecting wire ropes in shading systems
- **Material:** Pulley made of impact-resistant plastic, bracket made of galvanized steel
- **Rope diameter:** Suitable for wire ropes up to 3 mm
- **Installation:** Screw-on mounting on square tubes (55 × 34 mm)
- **Special feature:** Precise mounting position through centered rope tension

The **Pulley 90 with bracket 55.34** is a reliable solution for guiding and redirecting wire ropes in shading systems. Its combination of impact-resistant plastic and galvanized steel ensures high stability and durability.

Thanks to its thoughtful design, the wire rope is automatically centered by the tension, ensuring a precise mounting position. The pulley is suitable for wire ropes up to 3 mm in diameter and can be screwed directly onto square tubes measuring 55 × 34 mm.

Mounting requires an M6 × 65 screw and an M6 nut, which must be ordered separately.

Note: Screws and nuts for mounting are not included in the delivery.